


CURVA 30° SEGMENTADA

Curva 30° - Raio = 1,5.DE

PN da Conexão = 0,8 x PN equivalente SDR da extremidade

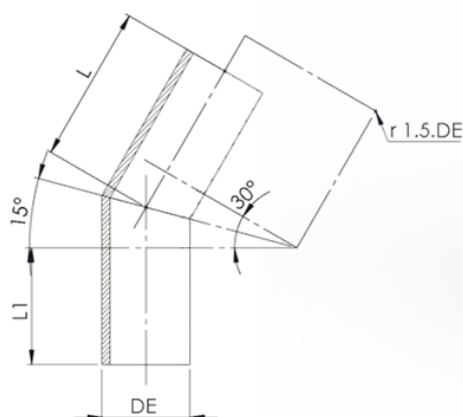

MATERIAL: PE 100 PRETO

APLICAÇÃO: ÁGUA

NORMAS: PARA ÁGUA E LÍQUIDOS EM GERAL: NBR 15593 - ISO 4427-3 - EN 12201-3 - DIN 16963


Código	DE (mm)	L1 (mm)	L (mm)	Peso (kg)								
				PN 3,2	PN 4	PN 5	PN 6	PN 8	PN 10	PN 12,4	PN 16	PN 20
				SDR								
				41	33	26	21	17	13	11	09	07
CSGCU1P063 SD3P	63	150	175	-	-	-	-	0,25	0,30	0,37	0,44	0,52
CSGCU1P075 SD3P	75	150	180	-	-	-	-	0,36	0,44	0,53	0,64	0,75
CSGCU1P090 SD3P	90	150	186	-	-	-	0,44	0,53	0,65	0,79	0,95	1,12
CSGCU1P110SD3P	110	150	194	-	-	0,55	0,68	0,83	1,02	1,24	1,48	1,75
CSGCU1P125SD3P	125	150	200	-	-	0,74	0,90	1,10	1,36	1,64	1,97	2,33
CSGCU1P140SD3P	140	150	206	-	0,77	0,95	1,17	1,42	1,75	2,12	2,54	3,00
CSGCU1P160SD3P	160	150	214	-	1,05	1,29	1,58	1,93	2,38	2,88	3,44	4,08
CSGCU1P180SD3P	180	250	322	-	1,99	2,45	3,00	3,66	4,50	5,47	6,53	7,73
CSGCU1P200SD3P	200	250	330	-	2,51	3,09	3,79	4,63	5,70	6,91	8,26	9,78
CSGCU1P225SD3P	225	250	340	-	3,28	4,03	4,95	6,04	7,43	9,01	10,77	12,75
CSGCU1P250SD3P	250	250	350	-	4,16	5,13	6,29	7,67	9,44	11,46	13,69	16,20
CSGCU1P280SD3P	280	250	363	-	5,40	6,65	8,15	9,96	12,25	14,86	17,76	21,02
CSGCU1P315SD3P	315	300	427	6,22	8,04	9,89	12,13	14,81	18,22	22,11	26,42	31,27
CSGCU1P355SD3P	355	400	543	10,03	12,97	15,96	19,58	23,90	29,41	35,68	42,64	50,45
CSGCU1P400SD3P	400	400	561	13,16	17,01	20,94	25,68	31,35	38,57	46,80	55,93	66,18
CSGCU1P450SD3P	450	400	581	17,25	22,30	27,45	33,66	41,09	50,56	61,34	73,31	86,75
CSGCU1P500SD3P	500	400	601	22,03	28,48	35,06	42,99	52,48	64,57	78,34	93,62	
CSGCU1P560SD3P	560	400	625	28,74	37,15	45,73	56,08	68,46	84,24	102,19		
CSGCU1P630SD3P	630	400	653	38,01	49,13	60,47	74,16	90,53	111,39	135,14		
CSGCU1P710SD3P	710	600	885	65,36	84,49	104,00	127,53	155,69	191,57	232,41		
CSGCU1P800SD3P	800	600	922	86,36	111,64	137,41	168,51	205,71	253,12	307,08		
CSGCU1P900SD3P	900	600	962	114,06	147,44	181,48	222,55	271,68	334,29	405,55		
CSGCU1PC10SD3P	1000	600	1002	146,68	189,62	233,39	286,20	349,39	429,91	521,55		
CSGCU1PC12SD3P	1200	600	1082	228,12	294,90	362,97	445,12	543,38	668,61			
CSGCU1PC14SD3P	1400	600	1163	333,51	431,13	530,66	650,75	794,41	977,49			
CSGCU1PC16SD3P	1600	600	1243	465,65	601,96	740,92	908,59	1109,18	1364,81			

SD = SDR a ser definido

CURVA 30° SEGMENTADA

Curva 30° SUPER - Raio = 1,5.DE

PN da Conexão = PN equivalente SDR da extremidade

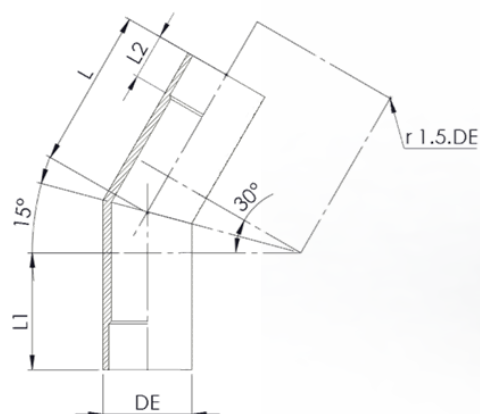

MATERIAL: PE 100 PRETO

APLICAÇÃO: ÁGUA

NORMAS: PARA ÁGUA E LÍQUIDOS EM GERAL: NBR 15593 - ISO 4427-3 - EN 12201-3 - DIN 16963

Código	DE (mm)	L1 (mm)	L (mm)	L2 (mm)	Peso (kg)								
					PN 4	PN 5	PN 6	PN 8	PN 10	PN 12,4	PN 16	PN 20	PN 25
					SDR								
					41	33	26	21	17	13	11	09	07
CSGCU1P063 SD 3PR	63	150	175,3	50,0	-	-	-	-	0,30	0,37	0,44	0,52	0,62
CSGCU1P075 SD 3PR	75	150	180,1	50,0	-	-	-	-	0,44	0,53	0,64	0,75	0,90
CSGCU1P090 SD 3PR	90	150	186,2	50,0	-	-	-	0,53	0,65	0,79	0,95	1,12	1,33
CSGCU1P110 SD 3PR	110	150	194,2	60,0	-	-	0,68	0,83	1,02	1,24	1,48	1,75	2,08
CSGCU1P125SD3PR	125	150	200,2	60,0	-	-	0,90	1,10	1,36	1,64	1,97	2,33	2,76
CSGCU1P140SD3PR	140	150	206,3	60,0	-	0,95	1,17	1,42	1,75	2,12	2,54	3,00	3,57
CSGCU1P160SD3PR	160	150	214,3	60,0	-	1,29	1,58	1,93	2,38	2,88	3,44	4,08	4,84
CSGCU1P180SD3PR	180	250	322,3	60,0	-	2,45	3,00	3,66	4,50	5,47	6,53	7,73	9,18
CSGCU1P200SD3PR	200	250	330,4	60,0	-	3,09	3,79	4,63	5,70	6,91	8,26	9,78	11,62
CSGCU1P225SD3PR	225	250	340,4	60,0	-	4,03	4,95	6,04	7,43	9,01	10,77	12,75	15,15
CSGCU1P250SD3PR	250	250	350,5	60,0	-	5,13	6,29	7,67	9,44	11,46	13,69	16,20	19,25
CSGCU1P280SD3PR	280	250	362,5	80,0	-	6,65	8,15	9,96	12,25	14,86	17,76	21,02	24,97
CSGCU1P315SD3PR	315	300	426,6	80,0	8,04	9,89	12,13	14,81	18,22	22,11	26,42	31,27	37,16
CSGCU1P355SD3PR	355	400	542,7	100,0	12,97	15,96	19,58	23,90	29,41	35,68	42,64	50,45	59,96
CSGCU1P400SD3PR	400	400	560,8	100,0	17,01	20,94	25,68	31,35	38,57	46,80	55,93	66,18	78,64
CSGCU1P450SD3PR	450	400	580,9	100,0	22,30	27,45	33,66	41,09	50,56	61,34	73,31	86,75	103,09

SD = SDR a ser definido