


TÊ 90° SEGMENTADA

TÊ 90°

PN da Conexão = 0,5 x PN equivalente SDR da extremidade

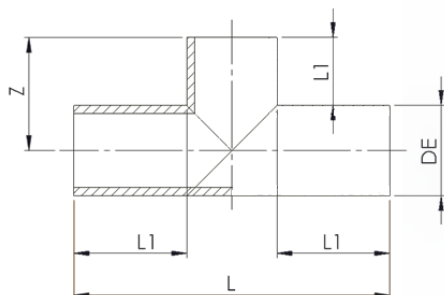

MATERIAL: PE 100 PRETO

APLICAÇÃO: ÁGUA

NORMAS: PARA ÁGUA E LÍQUIDOS EM GERAL: NBR 15953 - ISO 4427-3 - EN 12201-3 - DIN 16963


CÓDIGO	DE (mm)	L1 (mm)	Z (mm)	L (mm)	Peso (kg)								
					PN 2	PN 2,5	PN 3	PN 4	PN 5	PN 6	PN 8	PN 10	PN 12,5
					SDR								
					41	33	26	21	17	13	11	09	07
CSGTE1P063 SD9	63	150	181,5	363	-	-	-	-	0,35	0,44	0,53	0,63	0,75
CSGTE1P075 SD9	75	150	187,5	375	-	-	-	-	0,51	0,63	0,77	0,92	1,08
CSGTE1P090SD9	90	150	195	390	-	-	-	0,62	0,76	0,94	1,14	1,36	1,61
CSGTE1P110SD9	110	150	205	410	-	-	0,79	0,97	1,18	1,45	1,76	2,10	2,49
CSGTE1P125SD9	125	150	212,5	425	-	-	1,04	1,28	1,56	1,92	2,33	2,79	3,30
CSGTE1P140SD9	140	150	220	440	-	1,09	1,34	1,65	2,01	2,47	3,00	3,59	4,25
CSGTE1P160SD9	160	150	230	460	-	1,47	1,81	2,22	2,72	3,34	4,05	4,85	5,73
CSGTE1P180SD9	180	250	340	680	-	2,84	3,50	4,29	5,24	6,45	7,82	9,35	11,06
CSGTE1P200SD9	200	250	350	700	-	3,59	4,41	5,41	6,61	8,13	9,87	11,79	13,95
CSGTE1P225SD9	225	250	362,5	725	-	4,66	5,73	7,03	8,58	10,56	12,82	15,31	18,12
CSGTE1P250SD9	250	250	375	750	-	5,90	7,26	8,90	10,87	13,38	16,23	19,39	22,95
CSGTE1P280SD9	280	250	390	780	-	7,62	9,38	11,50	14,04	17,28	20,97	25,06	29,65
CSGTE1P315SD9	315	300	457,5	915	8,80	11,38	14,01	17,18	20,97	25,80	31,30	37,41	44,26
CSGTE1P355SD9	355	400	577,5	1155	14,31	18,50	22,77	27,92	34,08	41,94	50,88	60,80	71,95
CSGTE1P400SD9	400	400	600	1200	18,69	24,16	29,74	36,47	44,52	54,79	66,46	79,43	93,99
CSGTE1P450SD9	450	400	625	1250	24,40	31,54	38,82	47,60	58,11	71,51	86,75	103,67	122,68
CSGTE1P500SD9	500	400	650	1300	31,03	40,12	49,38	60,55	73,92	90,95	110,34	131,87	
CSGTE1P560SD9	560	400	680	1360	40,30	52,10	64,12	78,64	95,99	118,12	143,30		
CSGTE1P630SD9	630	400	715	1430	53,03	68,56	84,38	103,48	126,33	155,44	188,57		
CSGTE1P710SD9	710	600	955	1910	92,39	119,43	147,00	180,27	220,06	270,78	328,51		
CSGTE1P800SD9	800	600	1000	2000	121,50	157,07	193,32	237,07	289,41	356,11	432,02		
CSGTE1P900SD9	900	600	1050	2100	159,69	206,43	254,09	311,59	380,37	468,04	567,81		
CSGTE1P1000SD9	1000	600	1100	2200	204,45	264,29	325,30	398,92	486,99	599,22	726,96		
CSGTE1P1200SD9	1200	600	1200	2400	315,43	407,77	501,90	615,48	751,35	924,51			

SD - SDR a ser definido.

TÊ 90° SEGMENTADA

TÊ 90° - SUPER

PN da Conexão = PN equivalente SDR da extremidade

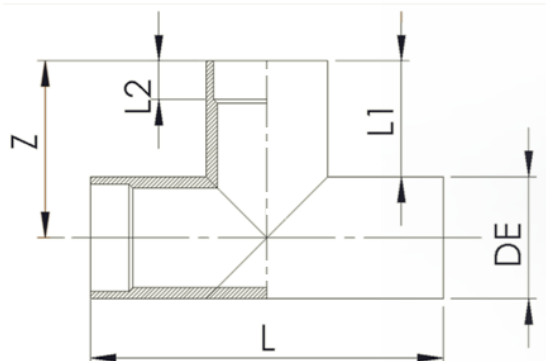

MATERIAL: PE 100 PRETO

APLICAÇÃO: ÁGUA

NORMAS: PARA ÁGUA E LÍQUIDOS EM GERAL: NBR 15953 - ISO 4427-3 - EN 12201-3 - DIN 16963

CÓDIGO	DE (mm)	L1 (mm)	Z (mm)	L (mm)	L2 (mm)	Peso (kg)						
						PN 4	PN 5	PN 6	PN 8	PN 10	PN 12,5	PN 16
						SDR						
						41	33	26	21	17	13	11
CSGTE1P063 SD9R	63	150	181,5	363	50,0	-	-	-	-	0,63	0,76	0,89
CSGTE1P075 SD9R	75	150	187,5	375	50,0	-	-	-	-	0,92	1,10	1,29
CSGTE1P090SD9R	90	150	195	390	50,0	-	-	-	1,14	1,36	1,63	1,91
CSGTE1P110SD9R	110	150	205	410	60,0	-	-	1,45	1,76	2,10	2,53	2,96
CSGTE1P125SD9R	125	150	212,5	425	60,0	-	-	1,92	2,33	2,79	3,36	3,92
CSGTE1P140SD9R	140	150	220	440	60,0	-	2,01	2,47	3,00	3,59	4,32	5,05
CSGTE1P160SD9R	160	150	230	460	60,0	-	2,72	3,34	4,05	4,85	5,83	6,81
CSGTE1P180SD9R	180	250	340	680	60,0	-	5,24	6,45	7,82	9,35	11,26	13,15
CSGTE1P200SD9R	200	250	350	700	60,0	-	6,61	8,13	9,87	11,79	14,19	16,58
CSGTE1P225SD9R	225	250	362,5	725	60,0	-	8,58	10,56	12,82	15,31	18,44	21,54
CSGTE1P250SD9R	250	250	375	750	60,0	-	10,87	13,38	16,23	19,39	23,35	27,27
CSGTE1P280SD9R	280	250	390	780	80,0	-	14,04	17,28	20,97	25,06	30,16	35,23
CSGTE1P315SD9R	315	300	457,5	915	80,0	17,18	20,97	25,80	31,30	37,41	45,03	52,60
CSGTE1P355SD9R	355	400	577,5	1155	100,0	27,92	34,08	41,94	50,88	60,80		
CSGTE1P400SD9R	400	400	600	1200	100,0	36,47	44,52	54,79	66,46	79,43		
CSGTE1P450SD9R	450	400	625	1250	100,0	47,60	58,11	71,51	86,75	103,67		
CSGTE1P500SD9R	500	400	650	1300	100,0	60,55	73,92	90,95	110,34	131,87		
CSGTE1P560SD9R	560	400	680	1360	100,0	78,64	95,99	118,12	143,30			
CSGTE1P630SD9R	630	400	715	1430	100,0	103,48	126,33	155,44	188,57			
CSGTE1P710SD9R	710	600	955	1910	100,0	180,27	220,06	270,78	328,51			
CSGTE1P800SD9R	800	600	1000	2000	100,0	237,07	289,41	356,11	432,02			
CSGTE1P900SD9R	900	600	1050	2100	100,0	311,59	380,37	468,04	567,81			
CSGTE1P1000SD9R	1000	600	1100	2200	100,0	398,92	486,99	599,22	726,96			
CSGTE1P1200SD9R	1200	600	1200	2400	100,0	615,48	751,35	924,51				

SD - SDR a ser definido.